With over 10 years experience in design, testing and racing we are an industry leader when it comes to

Generally you have several options available when selecting a triple clamp such as

- Solid or Rubber Mounted Bar Mounts (Most models)
- Bar Clamp Configuration (Moto, SX, Scotts or SUB Mount)
- Bar Mount Handlebar Size (7/8" or 1 1/8")
- Bar Mount Height (1.240", 1.360", 1.640")
- Bar Position (Relative to Stern)"
- Special Offsets (Available for certain models only)

## **VIEW RTS CHART**

{yoogallery src=[/media/imgs/prod\_info\_imgs/tc\_info\_imgs/viewer/] width=[100]}

BRP triple clamps are the only triple clamps on the market that are exclusively designed for mounting a

BRP triple clamps are manufactured to the highest quality standards from 6061-T6 billet aluminum mal

## **Bar Clamp and Bar Mount Configurations**

We offer 4 different bar mount configurations; Moto, SX, Scotts and SUB Mount. The Moto, SX and Sco

**Moto Bar Mounts** 



**Scotts Bar Mounts** 




**SUB Mount** 




## **Handlebar Position Options**

All triple clamps and bar mount configurations are different. At BRP most of our triple clamps offer a fart

Along with the image on Blae Fighitiand Ptaged pary positional characteria data term information you need to select the b

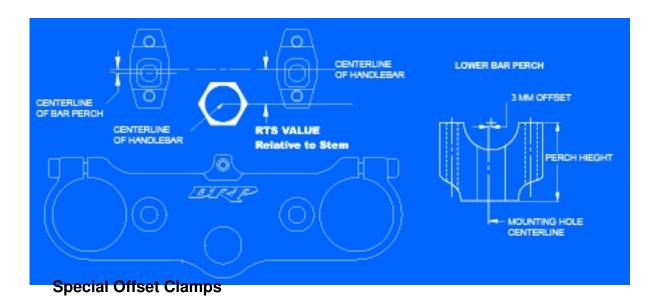

What is a triple clamp offset? Triple clamp offset is the distance measured between the centerline of the

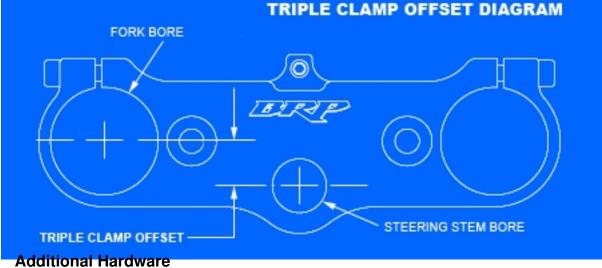

So Special bloods and equipment and existing the solution of t